

Product Specifications 50EPN65HD4

(179.83)

PISTOL CORDED NUTRUNNER 14 - 66 Nm (10.3 – 48.6 ft·lbs)

PISTOL - 50 SERIES

The NeoTek[™] fastening system is the next generation of smart tool solutions. The lightweight, ergonomic design along with fully programmable features such as the high-output LED light rings, audible alerts, and handle vibration all create a better user experience that leads to decreased operator fatigue and increased productivity.

FEATURES

- 1 million cycles maintenance-free*
- Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%
- 21% lighter (tool/cable system) than existing tool family
- Digital communication for reliable performance
- Internal temperature monitoring
- Configurable LED light rings
- Data logging with on-board tool memory
- Preventive maintenance alerts

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max:	14 / 66
------------	---------

TORQUE RANGE (ft·lb)

Min / Max: 10.3 / 48.6

SPEED

r/min:

900

Country of Origin: Assembled in USA

2.14 kg / 4.72 lb

288 mm / 11.33 in

22.0 mm / 0.86 in

1/2" Sq. Drive


CE

Weight

Length

Side to Center

Output Drive

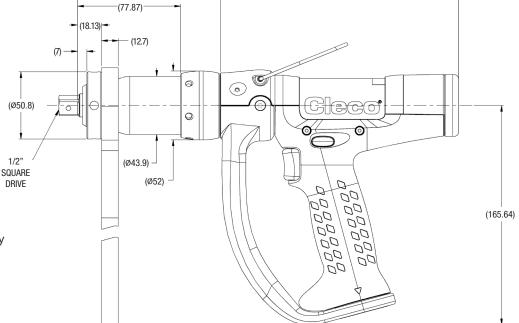

(108.05)

Cleco Production Tools *based on recommended tool model torque range and clockwise rotation

WEIGHT & DIMENSIONS

Apex Tool Group, LLC Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0 www.ClecoTools.com / www.ClecoTools.de