

## Product Specifications 30EPN05BDQ


PISTOL CORDED NUTRUNNER 0.9 - 4.7 Nm (0.6 – 3.4 ft·lbs)

**PISTOL - 30 SERIES** 

The NeoTek<sup>™</sup> fastening system is the next generation of smart tool solutions. The lightweight, ergonomic design along with fully programmable features such as the high-output LED light rings, audible alerts, and handle vibration all create a better user experience that leads to decreased operator fatigue and increased productivity.

## **FEATURES**

- 1 million cycles maintenance-free\*
- Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%
- 21% lighter (tool/cable system) than existing tool family
- Digital communication for reliable performance
- Internal temperature monitoring
- Configurable LED light rings
- Data logging with on-board tool memory
- Preventive maintenance alerts

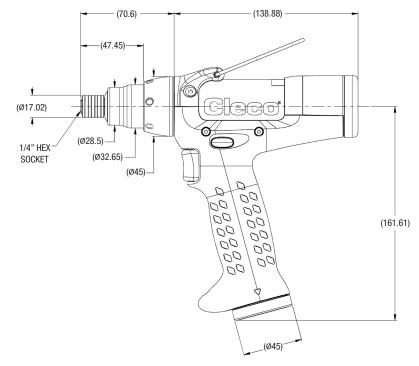

## **SPECIFICATIONS**

TORQUE	RANGE (Nm)
Min / Max:	0.9 / 4.7

<b>TORQUE RANG</b>	ie (ft·lb)
--------------------	------------

Min / Max: 0.6 / 3.4

## **SPEED**

r/min:

4,275

**WEIGHT & DIMENSIONS** 

Weight	0.96 kg / 2.16 lb
Length	210 mm / 8.26 in
Side to Center	16.3 mm / 0.64 in
Output Drive	1/4" QC Drive

Country of Origin: Assembled in USA



\*based on recommended tool model torque range and clockwise rotation

CE

Apex Tool Group, LLC Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0 www.ClecoTools.com / www.ClecoTools.de